




SOME PRODUCTS STAND OUT FOR THEIR GENEROUS DIMENSIONS, OTHERS FOR THE GREAT POWER EXPRESSED BY THE LIGHT THEY EMIT. SMILE, ON THE OTHER HAND, DOES NOT STAND OUT. AND IT IS PRECISELY FOR THIS REASON THAT IT IS THE BEST PATH MARKER SPOTLIGHT YOU WILL EVER USE: THE EXTREME MINIATURIZATION OF THE COMPONENTS AND AN IMPECCABLE ASSEMBLY MAKE IT AN ALMOST INVISIBLE ELEMENT, WHOSE PRESENCE IS REVEALED ONLY BY THE LIGHT IT EMITS. A LITTLE MAGIC, WITH A SMILE.



- 3 black RAL 9005
- 5 anodized alum.white 101N
- 6 satin stainless steel 316L

TECHNICAL SPECIFICATIONS

- 6026 anticorrosive aluminum housing.
- Anodized oxidation treatment 30 micron (UNI ISO9227:2012 saline test compliant).
- Extra clear tempered glass screen.
- Single-cable input, pre-assembled with neoprene cable.
- Silicon gasket.
- Compliant EN60598-1 and related annex.
- Available also with marine grade stainless steel 316l ring.
- Anticorrosive 6026 aluminum recessing box.
- Working temperature: Ta Min: -20°C Max: +50°C

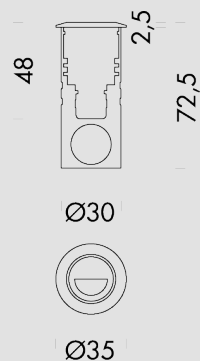

● FINISH

black RAL 9005 gloss 8-10

■ LED COLOR

2700K

▲ BEAM

Asymmetric

DETAILS

Light source:	LED
LED:	2700K
CRI:	80 (in accordance to EN62717)
Step MacAdam:	3
L90 Lifetime (Ta 35°):	80.000 hrs
W Led (real):	2.0
Lumen Tc 70° (real):	89

Nominal Voltage:	24V DC dimmable
Power supply:	Driver integrated NOT INCLUDED
Class:	III
Cable:	Single input - 2poles neoprene
Cable length:	40cm

IP:	IP67
IK:	08 (in accordance to IEC/EN62262)
Energy label:	A / A+ / A++



Warranty:	3 years, on request 5 years warranty extension
-----------	--

It is recommended to separate the LED board from the product to provide for the correct differentiated disposal of all components. The flow and power values are subject to tolerances. The images are only indicatives.

ACCESSORIES AVAILABLE

A0010

C219



503-TYPE BOXES ADAPTER

CONTROLLER 0-10V/1-10V/PUSH
24V PWM max. 250Hz

C224

D000

CONTROLLER DALI 24V PWM
max. 250Hz

DRIVER IP67 (IN 220/240V-OUT
24V) 20W

D001

D002

DRIVER IP67 (IN 220/240V-OUT
24V) 40W

DRIVER IP67 (IN 220/240V-OUT
24V) 60W

D003

D010

DRIVER IP67 (IN 220/240V-OUT
24V) 120W

DRIVER IP67 (IN 220/240V-OUT
24V) 185W

D020

DRIVER IP67 (IN 220/240V-OUT
24V) 240W