
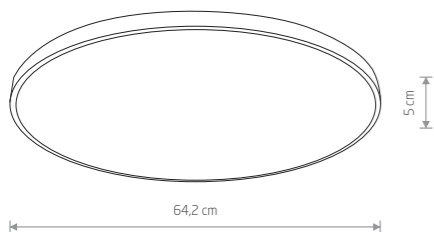



AGNES ROUND LED 8208



AGNES ROUND LED

Painted steel, plastic PMMA

- 8207 3000K ■ 8204 3000K
- 8186 4000K ■ 8183 4000K



AGNES ROUND LED

Painted steel, plastic PMMA

- 8208 3000K ■ 8205 3000K
- 8187 4000K ■ 8184 4000K






AGNES ROUND LED

Painted steel, plastic PMMA

- 8210 3000K ■ 8206 3000K
- 8188 4000K ■ 8185 4000K



AGNES SQUARE LED 8108

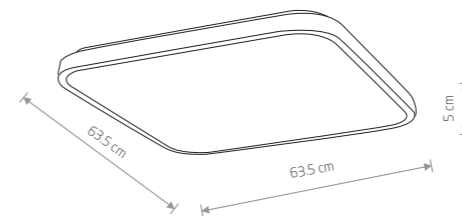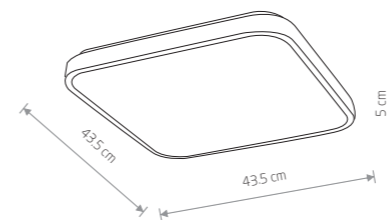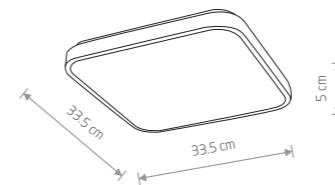

AGNES SQUARE LED

Painted steel, plastic PMMA

- 8112 3000K ■ 8108 3000K
- 8135 4000K ■ 8138 4000K



AGNES SQUARE LED

Painted steel, plastic PMMA

- 8113 3000K ■ 8110 3000K
- 8134 4000K ■ 8137 4000K



AGNES SQUARE LED

Painted steel, plastic PMMA

- 8114 3000K ■ 8111 3000K
- 8133 4000K ■ 8136 4000K



| Item No. | Power | Colour temp. | Luminous flux | Beam angle | Colour Rendering Index (CRI) | Input | Safety type | Ingress protection | Lifetime |
|----------|---------|--------------|---------------|------------|------------------------------|----------------------|-------------|--------------------|----------|
| 8207 | 22W LED | 3000K | 1300 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8204 | 22W LED | 3000K | 1200 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8186 | 22W LED | 4000K | 1500 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8183 | 22W LED | 4000K | 1300 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8208 | 32W LED | 3000K | 2000 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8205 | 32W LED | 3000K | 1700 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8187 | 32W LED | 4000K | 2300 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8184 | 32W LED | 4000K | 1800 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8210 | 64W LED | 3000K | 4200 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8206 | 64W LED | 3000K | 2700 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8188 | 64W LED | 4000K | 4300 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8185 | 64W LED | 4000K | 3900 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |

| Item No. | Power | Colour temp. | Luminous flux | Beam angle | Colour Rendering Index (CRI) | Input | Safety type | Ingress protection | Lifetime |
|----------|---------|--------------|---------------|------------|------------------------------|----------------------|-------------|--------------------|----------|
| 8112 | 16W LED | 3000K | 970 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8108 | 16W LED | 3000K | 830 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8135 | 16W LED | 4000K | 1000 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8138 | 16W LED | 4000K | 860 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8113 | 32W LED | 3000K | 2200 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8110 | 32W LED | 3000K | 1690 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8134 | 32W LED | 4000K | 2300 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8137 | 32W LED | 4000K | 1950 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8114 | 64W LED | 3000K | 4000 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8111 | 64W LED | 3000K | 3700 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8133 | 64W LED | 4000K | 4000 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |
| 8136 | 64W LED | 4000K | 3700 lm | 120° | ≥ 80 | ~220-230 V, 50/60 Hz | ⊕ | IP44 | 20000h |

WHITE

BLACK

Can be used in the bathroom

Can be used in the bathroom

WHITE

BLACK