

ITEM
B8CJ0170

LIGHT SOURCE
1×18W

LENS / SELECTED DEGREE(°)Ø1/2
B66 / 55°


INPUT VOLTAGE(V)
DC 24 240

OPERATING CURRENT(MA)
DC 24=840 240=91

CONSUMPTION(W)
DC 24=20.4 240=20.9

LUMINANCE(LM)
240=2205

IK
06



ITEM
B8EK0174

LIGHT SOURCE
1×30W

LENS / SELECTED DEGREE(°)Ø1/2
B57 / 60°


INPUT VOLTAGE(V)
DC 24 120 240

OPERATING CURRENT(MA)
DC 24=1130 120=286 240=151

CONSUMPTION(W)
DC 24=27 120=34.5 240=34.2

LUMINANCE(LM)
240=2851

IK
06



ITEM
B8ER0178

LIGHT SOURCE
1×48W

LENS / SELECTED DEGREE(°)Ø1/2
B57 / 60°


INPUT VOLTAGE(V)
240

OPERATING CURRENT(MA)
240=216

CONSUMPTION(W)
240=50


LUMINANCE(LM)
240=4482

IK
06

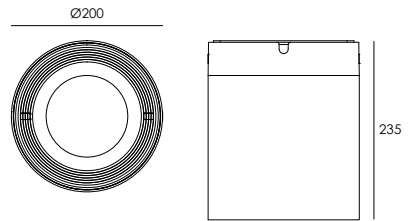

ACCESSORIES(Optional)

HONEYCOMB LOUVER



ID	Fitted Item
Mh074	B8CJ0170
Mh072	R8EKU0174
Mh066	B8ERU0178



HOUSING MATERIAL	Extruded aluminum alloy #6063
PAINTING	Powder coating, T= 60~80 μm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	Glass T=3mm
REFLECTOR	OPTICS reflector. efficiency≥85%
LED	NICHIA
POWER CABLE	Outside of luminaire H05RN-F 2×1.0mm ² , L=0.3m(12V/24V) H05RN-F 3×1.0mm ² , L=0.3m(120V/240V)
OPERATING TEMPERATURE	-20°C~40°C


REGULAR PAINTING COLOR

Basic	Secondary
Dark Grey KAP 7037	Sanded Black RAL 9005
	Sanded White RAL 9003

OPTICS Referenced Degree(°)θ1/2

	B66	15°	20°	25°	38°	55°
	B57	15°	25°	36°	60°	

FEATURES

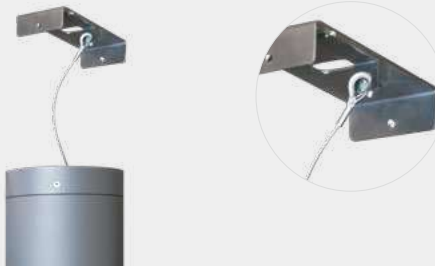

Safety hook

Hook at the fixator for safer wiring, leave the hook for protection.

PHOTOMETRIC

