

# High Luminance Output Landscape Flood Light



R3BG0126




R3BI0325

## Basic color selection


Sanded Black RAL9005	Silver Resistant Paint RAL9006	Dark Grey PANTONE 432u

Unit:mm

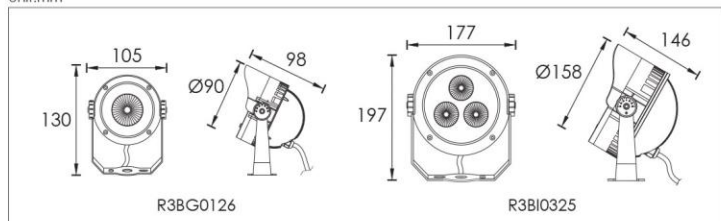

## Material specifications

Housing	12# Die-casting dark grey powder coated aluminum. T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
Glass	Tempered glass.T=4mm
Reflector	Optical Reflector efficiency≥90%
Cable gland	IP-68 PG-9 PVC
LED	R3BG0126 COB LED 6W/R3BI0325 COB LED 5W
Bracket	Powder coated aluminum
Gasket	Tooling shaped seal
Power Cable	H05RN-F 2X1.0mm <sup>2</sup> L=2.0m(low voltage) H05RN-F 3X1.0mm <sup>2</sup> L=2.0m(high voltage)

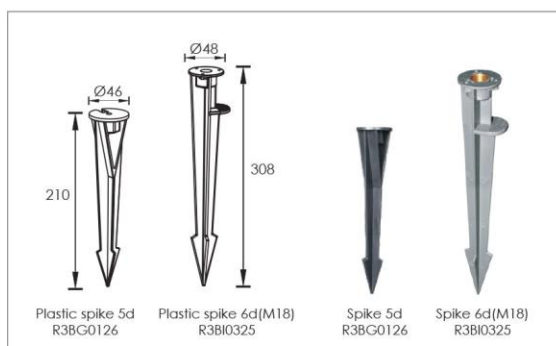

Item	Light source	Reflector	The manufacturer selected lens degree(°)θ1/2	Input voltage(v)	Typical operating current(mA)	Typical consumption(w)	Typical luminance(lm)	IK rate
R3BG0126	1×6W COB	R5	25°	24V DC 120/240	24V =270 120V = 60 240V = 35	24V = 6.5 120V = 7.0 240V = 7.0	Cool white=536 Warm white=452	07
R3BI0325	3×5W COB	R5	25°	120/240	120V =154 240V = 82	120V =18.5 240V =18.5	Cool white=1373 Warm white=1230	08