

ITEM	HEIGHT(mm)	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
D9AHL2434A	300	24×0.2W NICHIA	DC 24	DC 24=200	DC 24=4.8	300	07
D9AHM2434A	550		120	120=80	120=6.0		
D9AHH2434A	800		240	240=50	240=6.1		

- HOUSING** T=60-80µm Adhesion of ISO class 1/ASTM class 4B 12# Die-casting powder coated aluminum.
- LIGHT WINDOW** PMMA
- LED** SMD3030
- LED DRIVER** Constant Voltage Input, Constant Current Output
- OPERATING TEMPERATURE** -20°C~40°C
- POWER CABLE** Outside of luminaire
12V/24V: H05RN-F 2×1.0mm², L=0.5m
120V/240V: H05RN-F 3×1.0mm², L=0.5m
- BASE** Flange base
- DIMMING SUPPORT** Triac PWM Available
1-10V Dali Customized

Modular Light Source and Power with IP-66



- 1 IP66 light source module pc cover
- 2 IP66 built-in power module
- 3 IP67 cable gland



REGULAR PAINTING COLOR

- Basic** Sanded Black RAL 9005
- Secondary** Dark Grey KAP 7037
- Light Sanded Grey RAL 7038

INSTALLATION BASE

- 1. Flange Base(included)
 - 2. Inground Base(option)
-

PHOTOMETRIC

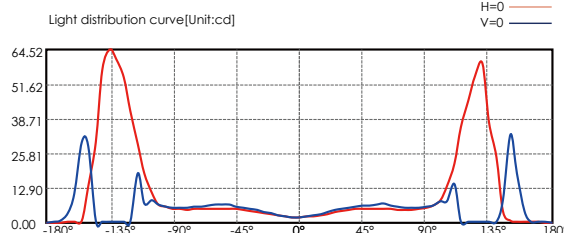

Horiz. Spread: 43.9

Height (m)	Center Beam LUX	Beam Width (m)
2	0.51 LUX	1.6m
4	0.13 LUX	3.2m
6	0.06 LUX	4.8m
8	0.03 LUX	6.4m
10	0.02 LUX	8.1m
12	0.01 LUX	9.7m