

















projection.



It can be supplied with different color temperature white LEDs (warm, neutral and cool) or red, green, blue LEDs.

Utilizes high brightness LEDs combined with an high efficient optic system for a rectangular

Standard fixture colour finishing is grey. Optional black and white (art. FX-COLOUR). Optional black and white (art. FX-COLOUR).

TECHNICAL FEATURES

• SOURCE

n. 60 (5W) White LEDs 5000K Total light power: 180W Total out lumen: 24000lm

OPTIC

Square Opening (20°x30°) 38mm lenses On request: 15° and 40° (38 mm lenses)

- TILT Manual 160°
- CONTROL None
- CONNECTIONS

Main Power: 3x0,75mm cable

 RATING PROTECTION **IP 67**

- SETUP AND CONFIGURATION Plug-in
- POWER SUPPLY

Voltage range: 88-264VAC, 124-370VDC

Frequency range: 47-63Hz

Active Power factor: PF>0.95/230VAC,

PF>0.98/115VAC

Current: 0.7A@230VAC: Fuse inside Power Supply

Power: 200W

PHYSICAL

WxDxH: 611,5x130x340 mm


Weight: 15 Kg.



Click on the QR Code with your smartphone to go directly to the fixture website page



PHYSICAL

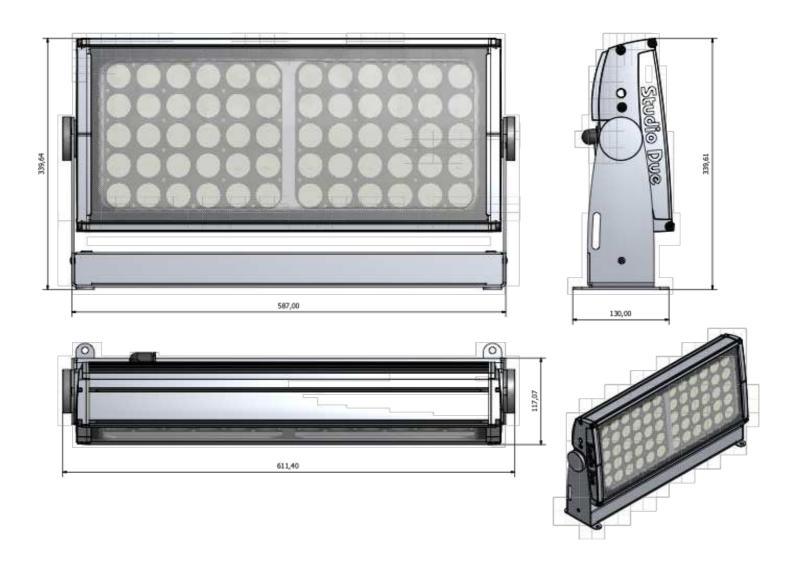

© Copyright 2014 Studio Due light srl Strada Poggino, 100 01100 Viterbo (Italy) tel. +39.0761.352520 (4 lines) fax +39.0761.352653 C.F. e P. IVA 05793121004