

Boxet is a family of a small high-power recessed luminaires with a minimalist and clean effect. The Unified Glare Rate (UGR) is less than 13 thanks to its reflector that makes almost imperceptible that it is on and does not dazzle. This makes it ideal for projects that require high visual comfort. Available in modules of one, two, five and ten; It has a modular fixed or tilting version



Boxet

Index protection IP20	Colour temp. 2700K / 3000K / 4000K
UGR <13	Technology LED
Flicker Flicker free <5%	Guarantee 5 years
Step McAdam 3-SDCM	Class II
Driver Included	Voltage 230V
CRI > 90	Bluetooth >20m
Lifetime 65.000h L80B10	Tilting 30° (19205- / 19210-)



ES

La familia BOXET está compuesta por pequeña luminaria empotrable de alta potencia que nos permite alcanzar un efecto minimalista y limpio. El UGR o índice de deslumbramiento unificado es menor a 13 gracias a su reflector hace que sea casi imperceptible que está encendida y no deslumbre nada. Esto la hace ideal para proyectos que requieren un alto confort visual. Disponible en módulos de uno, dos, cinco y diez; tiene versión modular fija o basculante.

FR

La famille BOXET est composée de petits luminaires encastrés de haute puissance qui nous permettent d'obtenir un effet minimaliste et propre. L'UGR ou indice d'éblouissement unifié est inférieur à 13 grâce à son réflecteur qui rend presque imperceptible le fait qu'il soit allumé et n'éblouit pas du tout. Il est donc idéal pour les projets qui exigent un grand confort visuel. Disponible en modules de un, deux, cinq et dix, il est disponible en version modulaire fixe ou inclinable.

IT

La famiglia BOXET è composta da piccoli apparecchi da incasso ad alta potenza che permettono di ottenere un effetto minimalista e pulito. L'UGR, o indice di abbagliamento unificato, è inferiore a 13: grazie al suo riflettore quasi non si nota che è acceso e non abbaglia affatto. Questa qualità lo rende ideale per progetti che richiedono un elevato confort visivo. Disponibile in moduli da uno, due, cinque e dieci; ha una versione modulare fissa o inclinabile.




Apartment in Sabadell by Exitprojectes Arquitectos.
Photography by Eugeni Aguiló






19101-




45mm
50mm
Cut-out 38x38mm

19102-




73mm
50mm
Cut-out 67x38mm

19105-



148mm
50mm
Cut-out 141x38mm

19110-

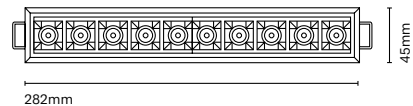

282mm
50mm
Cut-out 275x38mm

	Colour/Reflector	CRI/Temp.	Angle	Led	Dimming
19101-	0 White / Black	H 90 / 2700K	1 12°	0 210 lm / 2W	On-Off
	1 Black	E 90 / 3000K	3 34°		N Dali no-push
	W White / White	F 90 / 4000K	4 48°		

	Colour/Reflector	CRI/Temp.	Angle	Led	Dimming
19102-	0 White / Black	H 90 / 2700K	1 12°	0 420 lm / 4W	On-Off
	1 Black	E 90 / 3000K	3 34°		N Dali no-push
	W White / White	F 90 / 4000K	4 48°		


	Colour/Reflector	CRI/Temp.	Angle	Led	Dimming	Emergency
19105-	0 White / Black	H 90 / 2700K	1 12°	1 1050 lm / 10W	- On-Off	- No Emergency
	1 Black	E 90 / 3000K	3 34°		D Dali push	EM Kit 1h
	W White / White	F 90 / 4000K	4 48°		B Bluetooth	
					M Matter	

	Colour/Reflector	CRI/Temp.	Angle	Led	Dimming	Emergency
19110-	0 White / Black	H 90 / 2700K	1 12°	2 2100 lm / 20W	- On-Off	- No Emergency
	1 Black	E 90 / 3000K	3 34°		D Dali push	EM Kit 1h
	W White / White	F 90 / 4000K	4 48°		N Dali no-push	
					B Bluetooth	
					M Matter	


• Customization options available under request:
Special colors (minimum units)



19205-
Boxet Adjustable 10 W

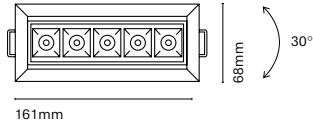


161mm




Cut-out 154x55mm

19210-
Boxet Adjustable 20 W

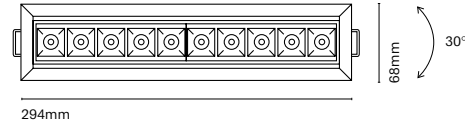

294mm



Cut-out 288x55mm

	Colour	CRI/Temp.	Angle	Led	Dimming	Emergency
19205-	0 White	H 90 / 2700K	1 12°	1 1050 lm / 10W	- On-Off	- No Emergency
	1 Black	E 90 / 3000K	3 34°		D Dali push	EM Kit 1h
	W White / White	F 90 / 4000K	4 48°		B Bluetooth M Matter	
	Colour	CRI/Temp.	Angle	Led	Dimming	Emergency
19210-	0 White	H 90 / 2700K	1 12°	2 2100 lm / 20W	- On-Off	- No Emergency
	1 Black	E 90 / 3000K	3 34°		D Dali push	EM Kit 1h
	W White / White	F 90 / 4000K	4 48°		N Dali no-push B Bluetooth M Matter	

• Customization options available under request:
Special colors (minimum units)